

10G DWDM SFP+ 50GHz 1528.77nm-1563.86nm 80KM DOM Transceiver

DWDM-SFP10G-80



Application

- 10GBASE-ZR/ZW
- 10G Fiber Channel
- OBSAI rates 6.144 Gb/s, 3.072 Gb/s, 1.536 Gb/s, 0.768Gb/s
- CPRI rates 9.830 Gb/s, 7.373Gb/s, 6.144 Gb/s, 4.915 Gb/s, 2.458 Gb/s, 1.229 Gb/s, 0.614Gb/s
- Other optical links

Features

- Available in all C-Band Wavelengths on the 50GHz DWDM ITU Grid
- Duplex LC Connector
- Temperature-Stabilized DWDM EML Transmitter
- Power Dissipation (0°C to 70°C) < 1.5W
- Power Dissipation (-40°C to 85°C) < 1.8W
- Dispersion tolerance: 1600ps/nm
- Hot-Pluggable SFP+ Footprint
- Compliant with SFF-8431 MSA and SFF-8432 MSA
- Built-in digital diagnostic functions, including optical power monitoring
- Commercial temperature range: 0°C to 70°C

Description

The DWDM-SFP10G-80 series single mode transceiver is small form factor pluggable module for duplex optical data communications. This module is designed to deploy in the DWDM networking equipment in metropolitan access and core networks and operates at a nominal DWDM wavelength from 1528nm to 1566nm as specified by the ITU-T. They are complaint with the SFF-8431 MSA and SFF-8432 MSA .

Product Specifications

I.General Specifications

Parameter	Symbol	Min	Typ.	Max	Unit	Ref.
Module Form Factor	BR	9.95		10.5	Gb/s	1
Number of Lanes	BER			10 ⁻¹²		2
Maximum Aggregate Data Rate	L _{max}		80		km	

Notes:

1. 10GBASE-ZR, 10GBASE-ZW, 1200-SM-LL-L 10GFC.
2. Tested with a PRBS 2³¹-1 test pattern.

II. Absolute Maximum Ratings

Parameter	Symbol	Min	Typ.	Max	Unit
Storage Temperature	T _s	-40		85	°C
Supply Voltage	V _{cc}	-0.5		3.6	V
Operating Relative Humidity				95	%

III. Electrical Characteristics (TOP= 0 to 70 ° C, VCC = 3.14 to 3.46 Volts)

Parameter	Symbol	Min	Typ.	Max	Unit	Notes
Power Supply Voltage	Vcc	3.15	3.3	3.45	V	
Power Supply Current	I _{cc} (0°C to 70°C)		350	455	mA	
	I _{cc} (-40°C to 85°C)		350	545	mA	
Date Rate	DR	0.6		11.3	Gbps	Date Rate
Transmitter						
TX_Dis	Disable		2	V _{cc} +0.3	V	
	Enable		0	0.8		
TX_FAULT	Fault		2	V _{cc} +0.3	V	
	Normal		0	0.5		
CML Inputs (Differential)	V _{in}	250		1000	mV _{pp}	AC coupled input
Input Impedance (Differential)	Z _{in}	85	100	115	ohm	R _{in} > 100 kohm @ DC
Receiver						
CML Outputs (Differential)	V _{out}	350		700	mV _{pp}	AC coupled output
RX_LOS	LOS		2	V _{cc} +0.3	V	
	Normal		0	0.8	V	
Output Impedance (Differential)	Z _{out}	85	100	115	ohm	
MOD_DEF (0:2)	VoH		2.5		V	With Serial ID
	VoL		0	0.5	V	

IV. Optical Characteristics (TOP = 0 to 70 °C, VCC = 3.14 to 3.46 V)

Parameter	Symbol	Min	Typ.	Max	Unit
Data Rate		0.6		11.3	Gbps
Transmitter					
Side Mode Suppression Ratio	SMSR	30			dB
Center Wavelength Spacing			50		GHz
			0.4		nm
Average Output Power	Pout	-1		4	dBm
Average Launch Power (Tx: OFF)	Poff			-30	dBm
Extinction Ratio	ER	3.5			dB
Transmitter Dispersion Penalty @1600ps/nm	TDP			2	dB
Pout@TX Disable Asserted	Pout			-45	dBm
Relative Intensity Noise	RIN			-128	dB/Hz
TX Jitter	TXj	Per 802.3ae requirements			
Receiver					
Receiver Sensitivity	Pmin			-23	dBm
Receiver Overload	Pmax	-1			dBm
LOS De-Assert	LOSD			-17	dBm
LOS Assert	LOSA	-29			dBm
LOS Hysteresis		1			dB

Notes:


1. Output is coupled into a 9/125μm single-mode fiber.
2. Minimum average optical power measured at the BER less than 1E-12. The measurepattern is PRBS 2³¹-1.
3. CML logic, internally AC coupled.

V. Wavelength Table

Channel	Frequency (THz)	Center Wavelength (nm)	Channel	Frequency (THz)	Center Wavelength (nm)
H61	196.15	1528.38	C50	195	1537.4
C61	196.1	1528.77	H49	194.95	1537.79
H60	196.05	1529.16	C49	194.9	1538.19
C60	196	1529.55	H48	194.85	1538.58
H59	195.95	1529.94	C48	194.8	1538.98
C59	195.9	1530.33	H47	194.75	1539.37
H58	195.85	1530.73	C47	194.7	1539.77
C58	195.8	1531.12	H46	194.65	1540.16
H57	195.75	1531.51	C46	194.6	1540.56
C57	195.7	1531.9	H45	194.55	1540.95
H56	195.65	1532.29	C45	194.5	1541.35
C56	195.6	1532.68	H44	194.45	1541.75
H55	195.55	1533.07	C44	194.4	1542.14
C55	195.5	1533.47	H43	194.35	1542.54
H54	195.45	1533.86	C43	194.3	1542.94
C54	195.4	1534.25	H42	194.25	1543.33
H53	195.35	1534.64	C42	194.2	1543.73
C53	195.3	1535.04	H41	194.15	1544.13
H52	195.25	1535.43	C41	194.1	1544.53
C52	195.2	1535.82	H40	194.05	1544.92
H51	195.15	1536.22	C40	194	1545.32
C51	195.1	1536.61	H39	193.95	1545.72
H50	195.05	1537	C39	193.9	1546.12

H38	193.85	1546.52	H27	192.75	1555.34
C38	193.8	1546.92	C27	192.7	1555.75
H37	193.75	1547.32	H26	192.65	1556.15
C37	193.7	1547.72	C26	192.6	1556.56
H36	193.65	1548.12	H25	192.55	1556.96
C36	193.6	1548.52	C25	192.5	1557.36
H35	193.55	1548.92	H24	192.45	1557.77
C35	193.5	1549.32	C24	192.4	1558.17
H34	193.45	1549.72	H23	192.35	1558.58
C34	193.4	1550.12	C23	192.3	1558.98
H33	193.35	1550.52	H22	192.25	1559.39
C33	193.3	1550.92	C22	192.2	1559.79
H32	193.25	1551.32	H21	192.15	1560.2
C32	193.2	1551.72	C21	192.1	1560.61
H31	193.15	1552.12	H20	192.05	1561.01
C31	193.1	1552.52	C20	192	1561.41
H30	193.05	1552.93	H19	191.95	1561.83
C30	193	1553.33	C19	191.9	1562.23
H29	192.95	1553.73	H18	191.85	1562.64
C29	192.9	1554.13	C18	191.8	1563.05
H28	192.85	1554.54	H17	191.75	1563.46
C28	192.8	1554.94	C17	191.7	1563.86

VI. Pin Description

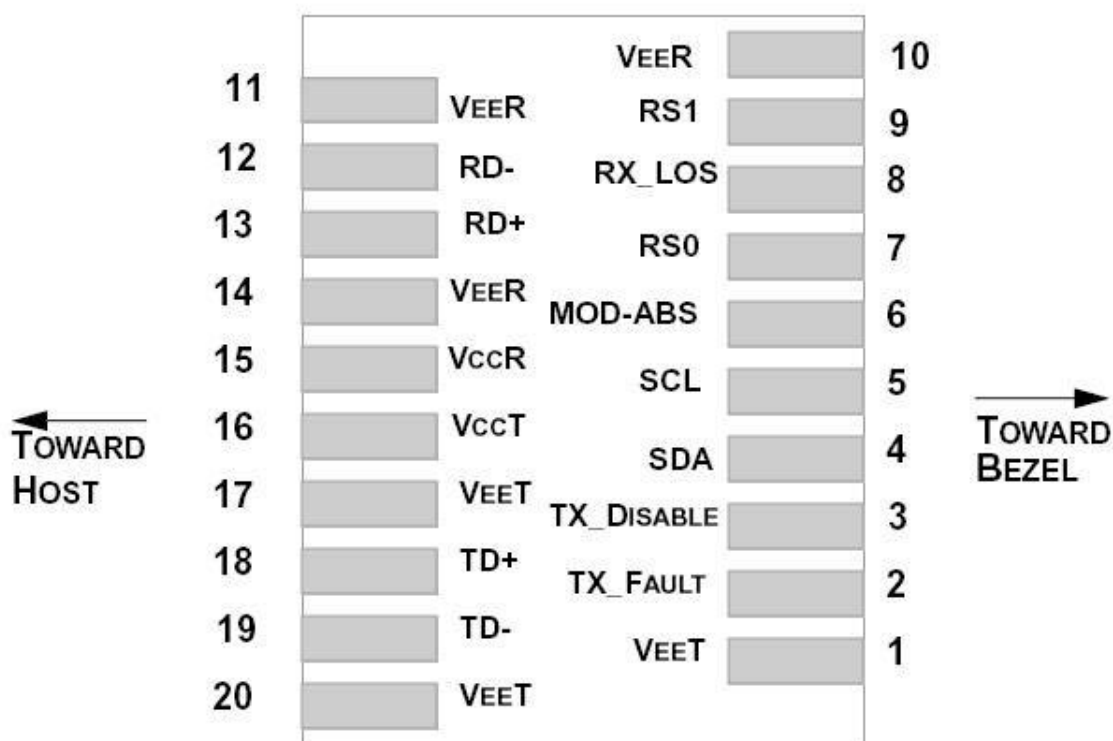

Pin Num.	Name	Function	Plug Seq.	Notes
1	VeeT	Transmitter Ground	1	Note 5
2	TX Fault	Transmitter Fault Indication	3	Note 1
3	TX Disable	Transmitter Disable	3	Note 2, Module disables on high or open
4	SDA	Module Definition 2	3	Note 3, Data line for Serial ID.
5	SCL	Module Definition 1	3	Note 3, Clock line for Serial ID.
6	MOD-ABS	Module Definition 0	3	Note 3
7	RS0	RX Rate Select (LVTTL).	3	Rate Select 0, optionally controls SFP+ module receiver. This pin is pulled low to VeeT with a >30K resistor




8	LOS	Loss of Signal	3	Note 4
9	RS1	TX Rate Select (LVTTL).	1	Rate Select 1, optionally controls SFP+ module transmitter. This pin is pulled low to VeeT with a >30K resistor.
10	VeeR	Receiver Ground	1	Note 5
11	VeeR	Receiver Ground	1	Note 5
12	RD	Inv. Received Data Out	3	Note 6
13	RD+	Received Data Out	3	Note 7
14	VeeR	Receiver Ground	1	Note 5
15	VccR	Receiver Power	2	3.3 ± 5%, Note 7
16	VccT	Transmitter Power	2	3.3 ± 5%, Note 7
17	VeeT	Transmitter Ground	1	Note 5
18	TD+	Transmit Data In	3	Note 8
19	TD-	Inv. Transmit Data In	3	Note 8
20	VeeT	Transmitter Ground	1	Note 5

Notes:

1. TX Fault is an open collector/drain output, which should be pulled up with a 4.7K - 10K resistor on the host board. Pull up voltage between 2.0V and VccT, R+0.3V. When high, output indicates a laser fault of some kind. Low indicates normal operation. In the low state, the output will be pulled to < 0.8V.
2. TX disable is an input that is used to shut down the transmitter optical output. It is pulled up within the module with a 4.7-10 K_x0002_ resistor. Its states are: Low (0 - 0.8V): Transmitter on (>0.8, < 2.0V): Undefined High (2.0 - 3.465V): Transmitter Disabled Open: Transmitter Disabled
3. Module absent, connected to VEET or VEER in the module.

4. LOS (Loss of Signal) is an open collector/drain output, which should be pulled up with a 4.7K–10K resistor. Pull up voltage between 2.0V and V_{ccT} , $R+0.3V$. When high, this output indicates the received optical power is below the worst-case receiver sensitivity (as defined by the standard in use). Low indicates normal operation. In the low state, the output will be pulled to $< 0.8V$.
5. VeeR and VeeT may be internally connected within the SFP+ module.
6. RD-/+: These are the differential receiver outputs. They are AC coupled 100 differential lines which should be terminated with 100(differential) at the user SERDES. The AC coupling is done inside the module and is thus not required on the host board.
7. VccR and VccT are the receiver and transmitter power supplies. They are defined as $3.3V \pm 5\%$ at the SFP+ connector pin. Maximum supply current is 300mA. Inductors with DC resistance of less than 1 ohm should be used in order to maintain the required voltage at the SFP+ input pin with 3.3V supply voltage. When the recommended supply-filtering network is used, hot plugging of the SFP+ transceiver module will result in an inrush current of no more than 30mA greater than the steady state value. VccR and VccT may be internally connected within the SFP+ transceiver module.
8. TD-/+: These are the differential transmitter inputs. They are AC-coupled, differential lines with 100 differential termination inside the module. The AC coupling is done inside the module and is thus not required on the host board.

VII. Mechanical Specifications

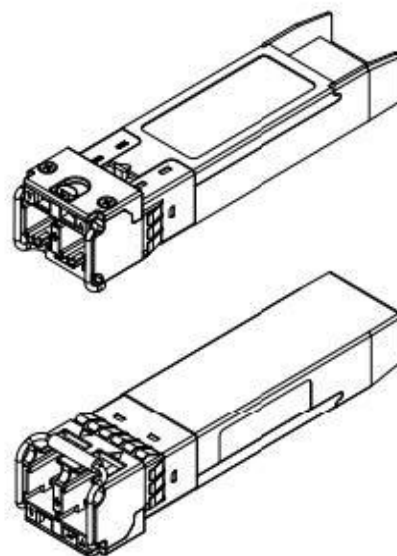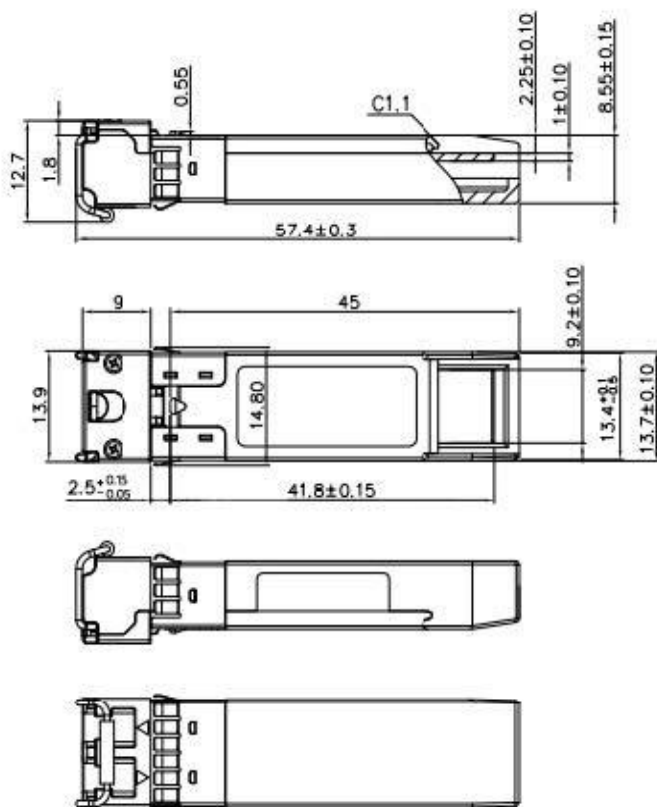

Unremarked tolerances $\pm 0.2\text{mm}$

Test Center

FS.COM transceivers are tested to ensure connectivity and compatibility in our test center before shipped out. FS.COM test center is supported by a variety of mainstream original brand switches and groups of professional staff, helping our customers make the most efficient use of our products in their systems, network designs and deployments.

The original switches could be found nowhere but at FS.COM test center, eg: Juniper MX960 & EX 4300 series, Cisco Nexus 9396PX & Cisco ASR 9000 Series, HP 5900 Series & HP 5406R ZL2 V3(J9996A), Arista 7050S-64, Brocade ICX7750-26Q & ICX6610-48, Avaya VSP 7000 MDA 2, etc.



Cisco ASR 9000 Series(A9K-MPA-1X40GE)



ARISTA 7050S-64(DCS-7050S-64)



Juniper MX960



Brocade ICX 7750-26Q



Extreme Networks X670V VIM-40G4X



Mellanox M3601Q



Dell N4032F



HP 5406R ZL2 V3(J9996A)



AVAYA 7024XLS(7002QQ-MDA)

Test Assured Program


FS.COM truly understands the value of compatibility and interoperability to each optics. Every module FS.COM provides must run through programming and an extensive series of platform diagnostic tests to prove its performance and compatibility. In our test center, we care of every detail from staff to facilities—professionally trained staff, advanced test facilities and comprehensive original-brand switches, to ensure our customers to receive the optics with superior quality.



Our smart data system allows effective product management and quality control according to the unique serial number, properly tracking the order, shipment and every part.



With a comprehensive line of original-brand switches, we can recreate an environment and test each optics in practical application to ensure quality and distance.

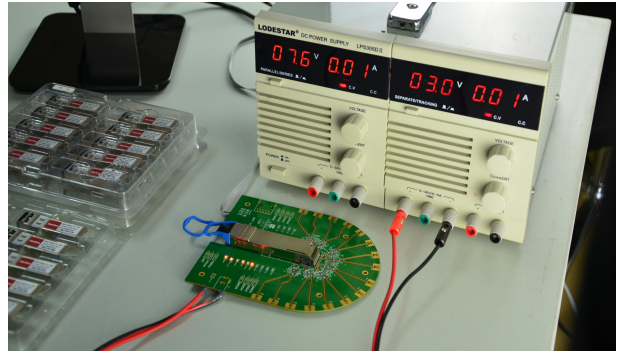

Our in-house coding facility programs all of our parts to standard OEM specs for compatibility on all major vendors and systems such as Cisco, Juniper, Brocade, HP, Dell, Arista and so on.



The last test assured step to ensure our products to be shipped with perfect package.

Order Information

Part Number	Description
DWDM-SFP10G-40	SFP+, 10GBase-ER, DWDM 100GHz 1528.77nm-1563.86nm, SMF, 40km, LC, DOM
DWDM-SFP10G-80	SFP+, 10GBase-ZR, DWDM 100GHz 1528.77nm-1563.86nm, SMF, 80km, LC, DOM
DWDM-SFP10G-40	SFP+, 10GBase-ER, DWDM 50GHz 1528.77nm-1563.86nm, SMF, 40km, LC, DOM
DWDM-SFP10G-80	SFP+, 10GBase-ZR, DWDM 50GHz 1528.77nm-1563.86nm, SMF, 80km, LC, DOM

Note:

10G DWDM SFP+ transceiver module is individually tested on corresponding equipment such as Cisco, Arista, Juniper, Dell, Brocade and other brands, and passes the monitoring of FS.COM intelligent quality control system.



 <https://www.fs.com>



The information in this document is subject to change without notice. FS has made all efforts to ensure the accuracy of the information, but all information in this document does not constitute any kind of warranty.